




PARTS LIST FOR MODEL 225LD

Congratulations on the purchase of your new Penn Graphite Lever Drag! Please keep this sheet for reference to 225LD part numbers, specifications and drag set-up. Good Fishing!

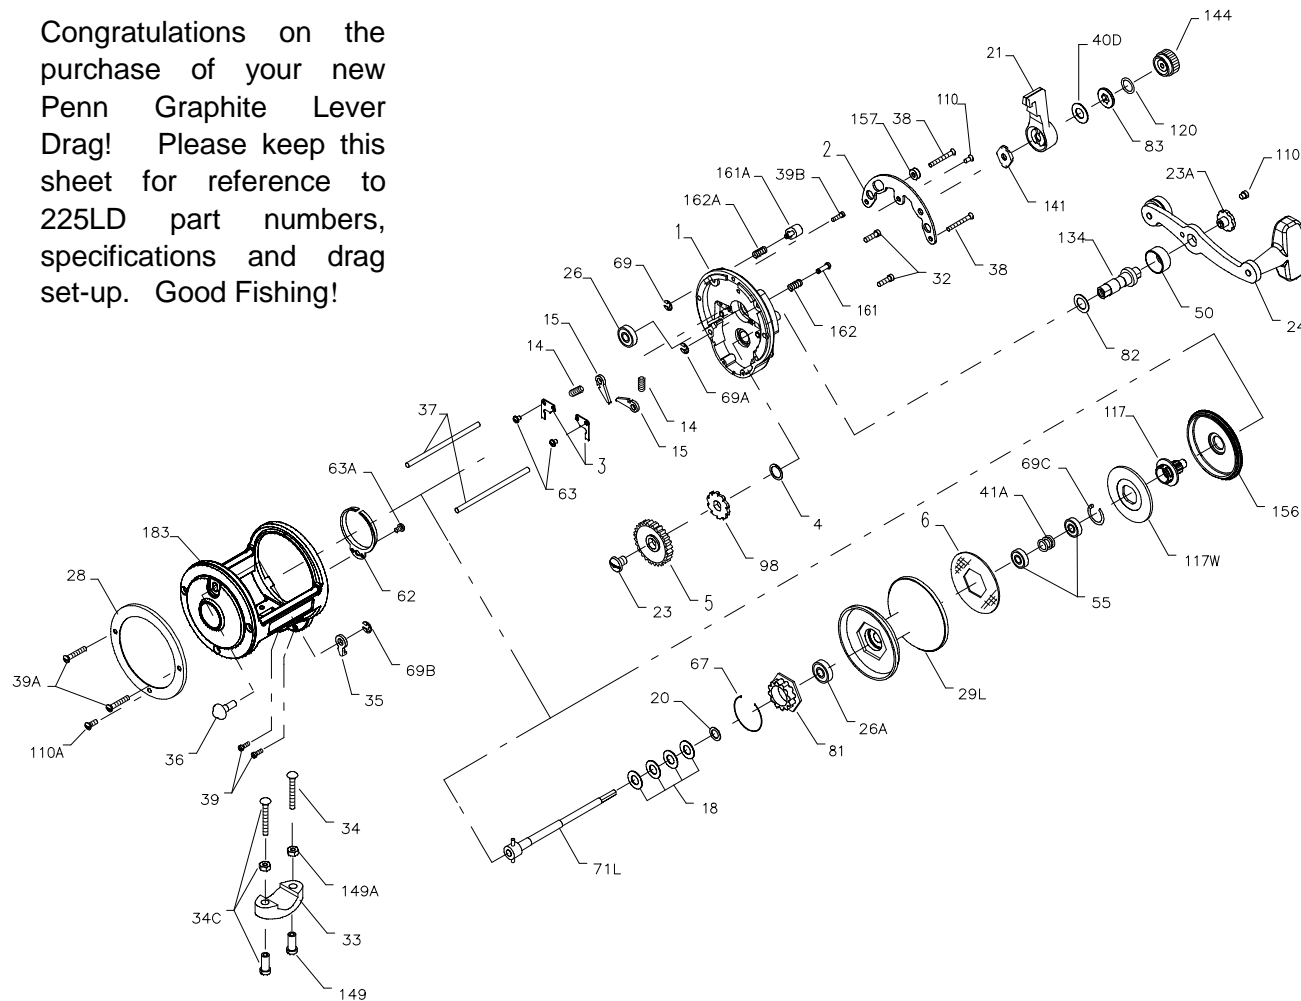

| KEY NO. | DESCRIPTION | PART NO. |
|---------|----------------------------------|-----------|
| 21 | Drag Cam Lever | 021R225 |
| 23 | Gear Mounting Screw | 023 006CH |
| 23A | Handle Screw | 023 114 |
| 24 | Handle | 024 225 |
| 26 | Ball Bearing Drive Plate | 026N025 |
| 26A | L.S. Spool Bearing | 026N025 |
| 28 | L.S. Ring | 028 025 |
| 29L | Spool | 029L225N |
| 32 | Lower Plate Screw (2 req.) | 031 210 |
| 33 | Rod Clamp | 033 113 |
| * | Ringed Rod Clamp (Optional) | *033R200 |
| 34 | Clamp Screw (Only) | 034 045 |
| 34C | Rod Clamp Screw w/Nuts | 034C045 |
| 35 | Click Tongue | 035 025 |
| 36 | Click Button | 036 025 |
| 37 | Post (2 req.) | 037 040 |
| 38 | R.S. Post Screw (2 req.) | 038 040 |
| 39 | Frame Screw (2 req.) | 046 4300 |
| 39A | L.S. Post Screw (2 req.) | 039 009 |
| 39B | R.S. Screw | 032 002 |
| 40D | Friction Washer | 040D025 |
| 41 | Pre-Set Knob Spring | 041N045 |
| 41A | Bearing Spring | 041 225 |
| 50 | Gear Stud Cover | 050 025 |
| 55 | Spool Bearing (2 req.) | 055 116 |
| 62 | Click Spring | 062 025 |
| 63 | Bridge Mounting Screw (2 req.) | 063 500S |
| 63A | Click Spring Screw | 063 500S |
| 67 | Ratchet Retaining Ring | 067 025 |
| 69 | Strike Button Retaining Ring | 069B050 |
| 69A | Free Spool Button Retaining Ring | 069B050 |
| 69B | Click Tongue Retaining Ring | 069B600 |
| 69C | Retaining Ring | 069C225 |
| 71L | Spool Spindle Assembly | 071L225 |
| 81 | Click Ratchet | 081 025 |
| 82 | Handle Shim | 082 025 |
| 83 | Pre-Set Collar | 083 225 |
| 98 | Main Gear Ratchet | 098 225 |
| 110 | R.S. Quadrant Screw | 110 050 |
| 110A | L.S. Stand Screw | 110 050 |
| 110B | Handle Lock Screw | 110 060 |
| 117 | Drive Plate Assembly | 117 225 |
| 117W | Drive Plate Washer | 117W225 |
| 120 | O-Ring | 120 113H |
| 134 | Gear Stud | 134 025 |
| * | Gear Stud Washer | *134A025 |
| 141 | Cam Follower | 141 225 |
| 144 | Pre-Set Knob | 144 025 |
| 149 | Clamp Nut (2 req.) | 149 045 |
| 149A | Hex Nuts (2 req.) | 149 200 |
| 156 | Drag Cover | 156 225 |
| 157 | Quadrant Spacer | 157 225 |
| 161 | Free Spool Button | 161 025 |
| 161A | Strike Button | 161 040 |
| 162 | Free Spool Button Spring | 162 050 |
| 162A | Strike Button Spring | 162 050 |
| 183 | Frame | 183 225 |

SPECIFICATIONS AND PRE-SETTING OF DRAG

| LINE CAPACITY | GEAR RATIO | LINE CLASS | STRIKE SETTING | FULL OR MAX. SETTING |
|-----------------------------|------------|----------------|----------------------|--------------------------|
| 425yds/20 lb 390M/0.45mm | 4.3-1 | 20 lb 10 kg | 4-7 lb 1,8 - 3 kg | 10-12 lb 4,5 - 5,5 kg |

| KEY NO. | DESCRIPTION | PART NO. |
|---------|-----------------------------|----------|
| 1 | Right Side Plate | 001 225 |
| 2 | Quadrant Ring | 002 025 |
| 3 | Dog Bridge (2 req.) | 003 225 |
| 4 | Gear Stud Washer | 004 025 |
| 5 | Main Gear | 005 225 |
| 6 | Drag Washer HT-100 | 006 225 |
| 13 | Pinion Gear | 013N025 |
| 14 | Dog Spring (2 req.) | 014 099 |
| 15 | Dog (2 req.) | 015N025 |
| 18 | Clutch Disc Spring (4 req.) | 018 040 |
| 20 | Thrust Washer | 020 040 |

*Not Shown